Operator's Manual SUPPLEMENT

MANCO MODEL NO. 415-10

WARNING:
Read Engine
Owner's Manual,
Vehicle Operator's
Manual, and
Supplement
Carefully Before
Operating
Vehicle.

Parts List



ORDERING PARTS

1) Seek Part(s) from your models illustrated diagram, cross over REF# to PART#


2) Type PART# into sites [Search Box] at GokartsRus.com OPEN IN NEW TAB OPEN I

3) Add all needed parts to Shopping Cart | Complete "Checkout" | ✓ Done!

If a part does not come up in a Site Search, please Contact Us (include part# in email)

BEFORE OPERATING THIS VEHICLE, THE OWNER AND/OR OPERATOR MUST UNDERSTAND THE VEHICLE WAS NOT DESIGNED OR MANUFACTURED TO MEET SPECIFICATIONS FOR USE ON PUBLIC ROADS, STREETS, HIGHWAYS, OR THOROUGHFARES AND HAVE READ AND HAVE AN UNDERSTANDING OF ALL THE INSTRUCTIONS FOR SAFE ASSEMBLY AND OPERATION AS WELL AS THE INSTRUCTIONS GOVERNING THE ENGINE AND OTHER PORTIONS OF THE VEHICLE.


922=--

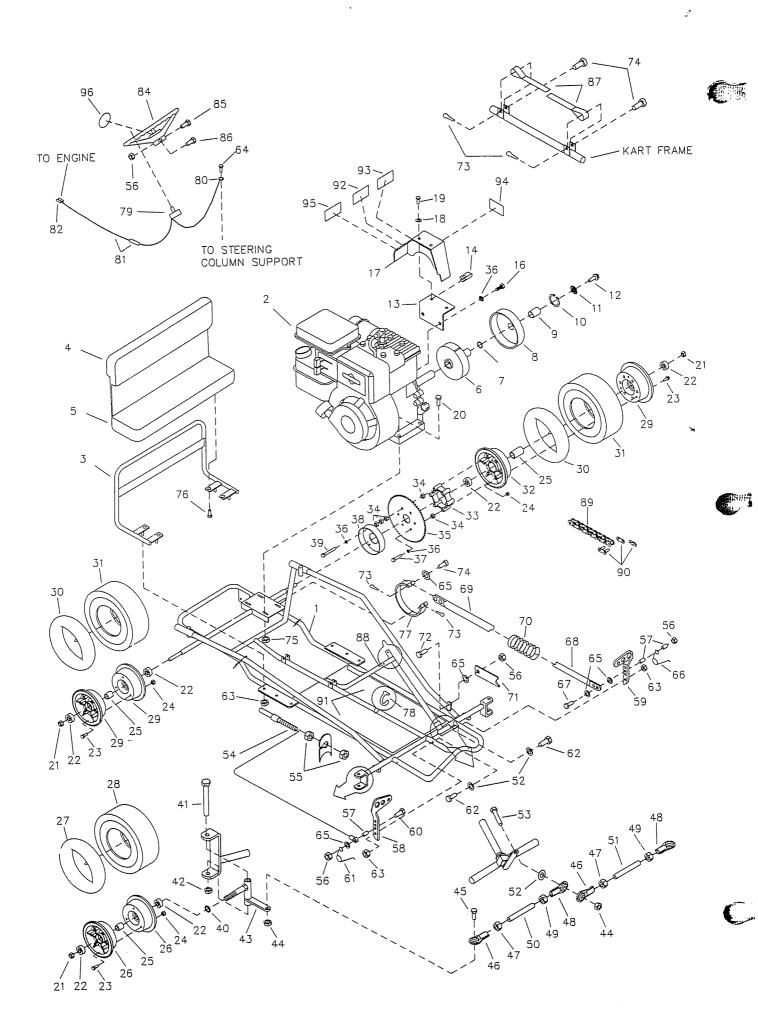


REPAIR PARTS - MODEL 415-10

	REF	PART		REF	PART	
			DECODICTION	NO.	NO.	DESCRIPTION DESCRIPTION
`	<u>NO.</u>	<u>NO.</u>	DESCRIPTION			Bolt, 3/8-16 x 1-3/4"
	1	9573-19	Frame	53	9145	•
	2	6010	Engine, 5hp	54	1390	Throttle Cable w/ Housing (inc. REF 55)
	3	3325-2	Seat Frame	55	9058	Nut, 5/16-24 Jam
	4	4328	Seat Back	56	9057	Nut, 1/4-20 Toplock
	5	4327	Seat Bottom	57	1389	Bushing
			Clutch Assembly (inc. REF 6-10)	58	1437	Pedal, Throttle
	ASM	4335		59	1436	Pedal, Brake
	6	4496	Clutch Rotor	60	1847	Bolt, 1/4-20 x 1"
	7	3146	Washer, Fiber		9502	Spring, Left Wound
	8	4491	Drum w/ Sprocket (inc. REF 9)	61		. •
	9	3143	Bushing	62	9110	Bolt, 5/16-18 x 1-3/4"
	10	3141	Snap Ring	63	1189	Nut, 5/16-18 Toplock
	11	9001	Washer, 3/8 Int/Ext Lock	64	9796	Screw,12-24 x 1/2" Self Tapping
	12	1491	Bolt, 5/16-24 x 3/4"	65	1854	Washer, #14 Flat
	13	3363-2	Bracket, Chainguard	66	9503	Spring, Right Wound
			Clip Nut	67	1849	Bolt, 1/4-20 x 1-1/2"
	14	5135		68	2377	Brake Rod, Front
	15	0.4.0.4		69	4351	Brake Rod, Rear
	16	9101	Bolt, 5/16-24 x 1/2"	70	9709	Spring
	17	3362	Chainguard	71	1982	Pedal Latch
	18	6039	Washer, #10 Lock	72	1846	Bolt, 1/4-20 x 3/4"
	19	6046	Screw, #10-24 x 1/2"			
	20	9186	Bolt, 5/16-18 x 1-1/2"	73	9116	Cotter Pin
	21	1046	Nut, 5/8-11 Topločk	74	9118	Clevis Pin
	ASM	2497	Front Wheel Assembly (inc. REF 22-28)	75	1263	Nut, 5/16-18 Flange
	ASM	,	Idle Wheel Asm (inc. REF 22-25,29-31)	76	9189	Bolt, 1/4-20 x 7/8"
	ASM		Drive Wheel Asm (inc. REF 22-25,29-39)	77	1036	Brake Band
				78	1019	Ty-Wrap
٠,	22	1093	Bearing	ASM	9799	Stop Switch Assembly (inc. REF 79-81)
•	23	5839	Bolt, 1/4-20 x 3/4"	79	1392	Stop Switch
	24	1186	Nut, 1/4-20	80	1393	Ring Terminal
	25	5949	Spanner	81	1394	Wire, 50" w/ Splice Connector
	26	5158	Wheel Half, Front 4"	82	3135	Blade Terminal, Female
	27	1053	Tube, Front 4"	83		
	28	2244	Tire, Front 4.10/3.50 x 4" Knobby	84	6038	Steering Wheel
	29	8004	Wheel Half, Rear 5" Untapped	85	9080	Bolt, 1/4-20 x 2-3/4"
	30	1753	Tube, Rear 5"		9160	Bolt, 1/4-20 x 7/8"
	31	2246	Tire, Rear 4.10/3.50 x 5" Knobby	86		Handhold Strap
	32	8006	Wheel Half, Rear 5" Tapped	87	4372	· · · · · · · · · · · · · · · · · · ·
	33	8008	Spacer	88	1463	Bushing, Insulating
	34	2388	Nut, 3/8-24	89	6073	Chain, #35 x 72 Pitch (inc. REF 90)
	35	8007	Sprocket, #35 Chain x 60 Teeth	90	1269	Master Link, #35 Chain
	36	9030	Washer, 5/16 Lock	91	4341	Decal, Floor Pan (L & R)
	37	9127	Bolt, 5/16-18 x 2-1/4"	92	1049	Decal, Caution
		1246	Brake Drum	93	4912	Decal, Warning
	38		Bolt, 5/16-18 x 3-1/2"	94	6791	Decal, Oil Clutch
	39	9000	Spacer, 5/8 ID x 1/4" Thick	95	6621	Decal, Tire Pressure
	40	1937		96	3296	Decal, Steering Wheel Center
	41	1264	Bolt, 1/2-13 x 3-1/2"	NI	4350	Vehicle Operator's Manual
	42	1012	Nut, 1/2-13 Toplock	NI	2601	Engine Owner's Manual
	43	8021	Spindle, Right Side		9212R1	
	NI	8020	Spindle, Left Side	NI		Decal, Hot Surfaces
	44	9085	Nut, 3/8-16 Toplock	NI	9677	
	45	9146	Bolt, 3/8-16 x 1-1/2"	NI	9678	Decal, Warning: Engine Exhaust
	ASN		Tie Rod Assembly (inc. REF 46-50)	NI	9679	Decal, No Riders Allowed
	ASN		Tie Rod Assembly (inc. REF 46-49,51)	NI	5964	Decal, Oil Warning
	, 46		Tie Rod End, Right Hand Thread			
مسرد	, 40 47		Nut, 3/8-24 Jam, Right Hand Thread			
	48		Tie Rod End, Left Hand Thread			
			Nut, 3/8-24 Jam, Left Hand Thread			
	49 50		Tie Rod, Long	ASN	1 = Asser	mbly
	50		Tie Rod, Short		Not Illus	
	51 52		Washer, 3/8 Flat	141	, tot muo	di marina an
			a e ricition. Of O 1 1016			

Washer, 3/8 Flat

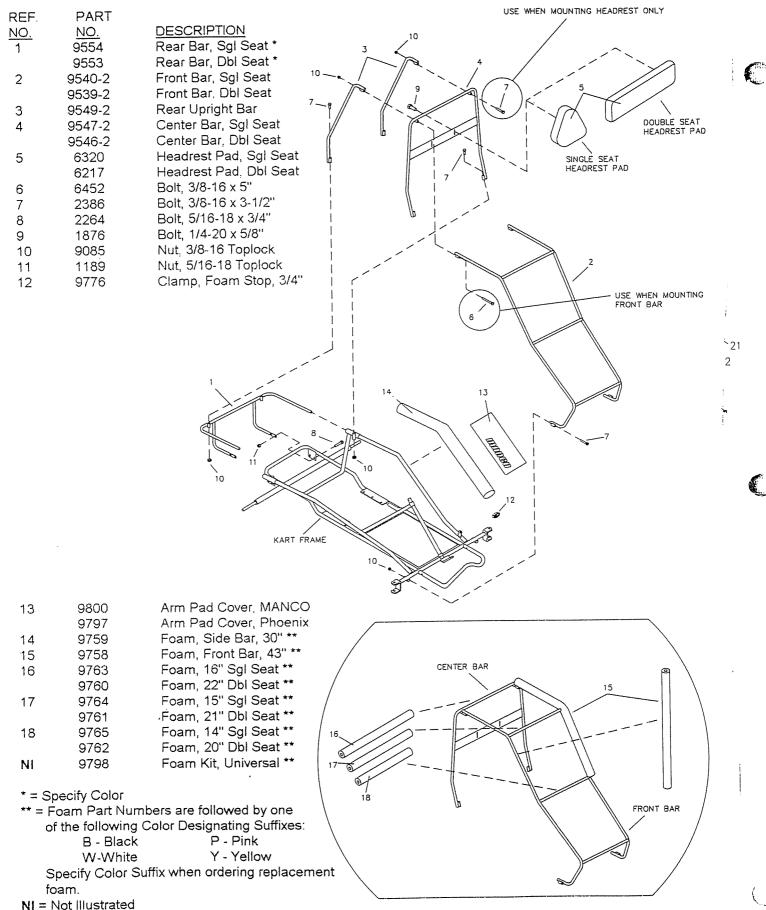

NOTE: Arm Pad Cover (REF. 13) is an optional part. It is not included with all Manco Kart Models.

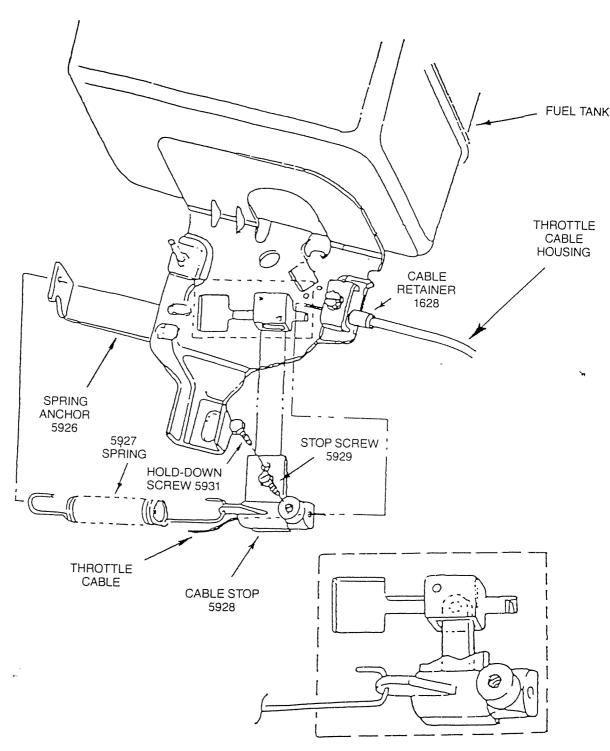

ASSEMBLY: Pass the throttle cable through the cable retainer and butt the throttle cable housing end against the inside shoulder of the cable retainer. (The cable retainer is to be securely fastened to the engine with the clamping screw.) Pass the end of the Throttle Cable through the hole in the cable stop. Before tightening cable stop screw:

- 1. Ensure spring anchor, spring, and cable are installed as illustrated above.
- 2. Ensure throttle pedal is in rearward (idle) position.

2 **A**\$

A٤

A٤

2

MINIMINIA

- 3. Ensure that there is no slack in the throttle cable with no tension applied to return spring.
- 4. Ensure cable housing is inside and against the cable retainer.