Operator's Manual SUPPLEMENT

MANCO MODELS NOS. 485 445




Models shown are deluxe versions.

ORDERING PARTS

- 1) Seek Part(s) from your models illustrated diagram, cross over REF# to PART#
- 2) Type PART# into sites [Search Box] at GoKartsRus.com OPEN IN NEW TAB OPEN I
- 3) Add all needed parts to Shopping Cart | Complete "Checkout" | ✓ Done!

If a part does not come up in a Site Search, please Contact Us (include part# in email)

12-92

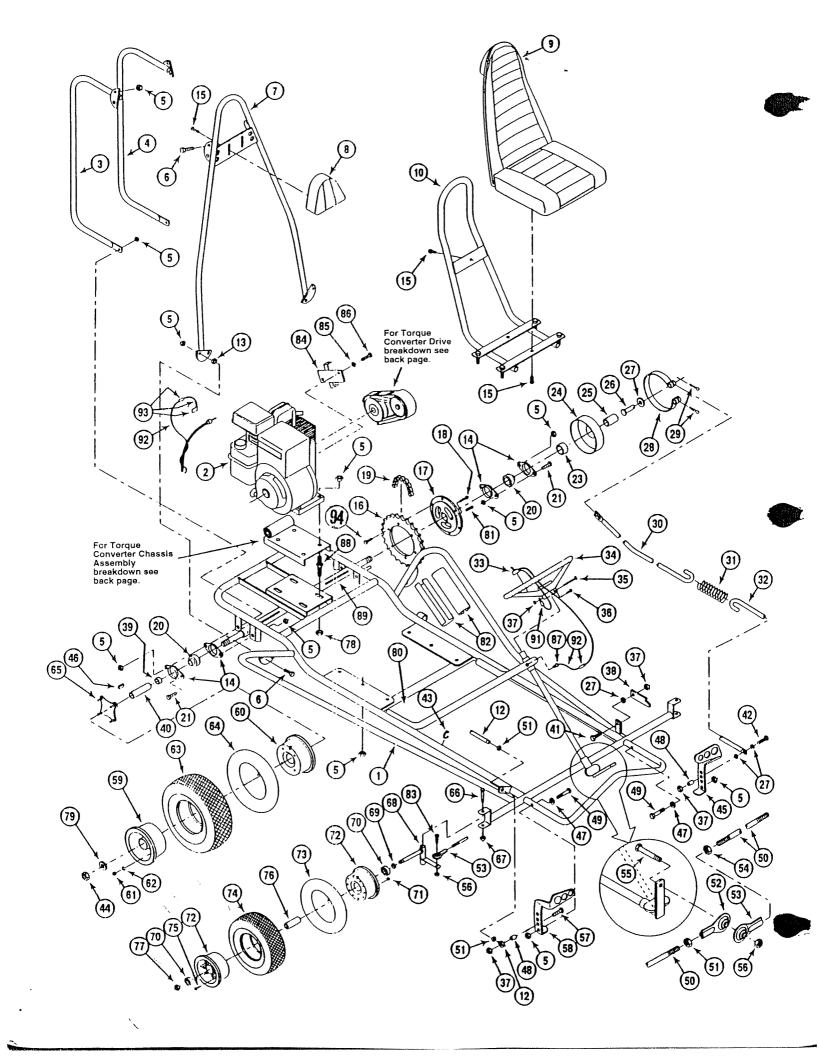


REPAIR PARTS

Models 445-03/04 & 485-03/04

NOTE: This repair parts list supplies part numbers for models 445-03/04 and 485-03/04. Most components are the same for all models. However, descriptions followed by a model number signify that part is only used on the models listed.

REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
1	4884-2	Frame (485-03/04)	59	4925	Wheel Half 6" Steel (w/Valve) (445-03 & 485-03)
1	6273-2	Frame (445-03/04)	59	4925-2	Wheel Half 6" Steel-Black (w/Valve) (445-04 &
2	6010	Engine 5 HP			485-04)
3	6529-2	Rear Bar RT (485-03/04)	60	4926	Wheel Half 6" Steel (w/o Valve) (445-03 & 485-03)
3	6537-2	Rear Bar RT (445-03/04)	60	4926-2	Wheel Half 6" Steel-Black (w/o Valve) (445-04 &
4	6530-2	Rear Bar LT (485-03/04)			485-04)
4	6544-2	Rear Bar &T (445-03/04)	61	2388	3/6-24 Hex Nut
5	1189	5/16-18 Hex Lock Nut	62	1130	% Split Lock Washer
5 6	2264	5/16-18 x 3/4 Hex Cap Screw	63	3801S	Tire 15 x 6 — 6 Turf Saver
7	6532-2	Center Bar (485-03/04)	64	3802	Inner Tube 6" JS87N Stem
7	6325-2	Center Bar (445-03/04)	65	4927	6" Live Axle Hub
8	6217	Headrest Double (485-03)	66	1264	½-13 x 3½ Hex Cap Screw
8	6580	Deluxe Headrest Dbl. (485-04)	67	1012	½-13 Hex Toplock Nut
8	6320	Headrest Single (445-03)	68	8020	Spindle
8	6585	Deluxe Headrest Sgl (445-04)	6 9	1937	Spacer, % ID x ¼ Lg.
9	4327	Seat Bottom/Flap (485-03)	70	1093	Bearing
5	4328	Seat Back (485-03)	71	1186	1/4-20 Hex Whizlock Nut
0	6579	Deluxe Dbl. Seat (485-04)	72	8004	Wheel Half-5" (445-03 & 485-03)
9	4324	'Single Seat (445-03)	72	8004-2	Wheel Half-5"-Black (445-04 & 485-04)
9		Deluxe Sgl. Seat (445-03)	73	1753	Inner Tube, 4.10-3.50 x 5 (Front)
9	6584	Cost Frame (495-03)	74	2246	Tire, 4.10-3.50 x 5 (Front)
10	3325-2	Seat Frame (485-03)	75	5839	1/4-20 x 3/4 Hex Flanged Whiz
10	6586-2	Seat Frame (485-04)	76	5949	Spanner % ID x 113/6 (Wh. Asm.)
10	3347-2	Seat Frame (445-03)	76 77	1046	%-11 Hex Lock Nut
12	1496	Throttle Cable (485-03/04)	77 78	1263	%-11 nex cock nut %-18 Hex FI. Whizlock Nut
12	1390	Throttle Cable (445-03/04)	78		
13	6232	Rubber Washer	79	1194	3/4 SAE Flat Washer
14	1760	Bearing Flange	80	4341	Pan Decal (485-03)
15	1876	¼-20 x ¼ Hex Fl. Whizlock Screw	80	6595	Pan Decal (485-04)
16	2998	Sprocket 35A72	80	4342	Pan Decal (445-03)
17	6280	Sprocket Hub	80	6596	Pan Decal (445-04)
18	6701	5/₁6-18 x 1 SHCS	81	1775	Key - 1/4 x 1/4 x 11/4
19	1324	Chain-#35 x 78 Pitch w/Masterlink	82	6126	Arm Pad (485-03 & 445-03)
20	3941	Bearing 1.0 ID	82	6581	Arm Pad Covers (485-04 & 445-04)
21	2264	5/16-18 x 3/4 Hex Cap Screw		6582	Arm Pad (485-04 & 445-04)
23	4914	Spacer, 1.0 ID x % Lg.	83	9146	%-16 x 1½ Hex Cap Screw
24	1078	Brake Drum	84	1494	Mounting Bracket
25	5646	Spacer, 1 0 ID x 21/4 Lg	85	9030	5/16 Internal Lock Washer
26	9118	1/4 Dia. x 11/4 Lg. Clevis Pin	86	9101	%6-24 x ½ Nylock Hex Cap Screw
27	1854	1/4 Std. Flat Washer	87	1463	Insulating Bushing
28	1492	Brake Band	88	1356	Stud Assembly
20 29	9116	3/32 Dia. x 3/4 Lg. Cotter Pin	89	1387	Axle Shaft (485-03/04)
29	4944-2	Brake Rod Rear	. 89	6274	Axle Shaft (445-03/04)
30			91	1393	Ring Terminal
31	5681	Compression Spring	92	1394	Stop Switch Wire
32	2377	Brake Rod Front	93	1406	Wiring Harness
33	1392	Stop Switch	94	9006	1/4-20 x 1/2 Hex Flanged Whiz
34	6038	Steering Wheel			Cable Retainer (See Back)
35	9080	1/4-20 x 23/4 Hex Cap Screw	NI	1628	
36	9160	1/4-20 x 1/4 Hex Cap Screw w/Nylock	NI	8021	Spindle Hand Hold (485-03/04)
37	9057	1/4-20 Hex Toplock Nut	NI	4372	Torque Convertor Cover Docal (445, 04)
38	1982	Pedal Latch	NI	6594	Torque Converter Cover Decal (445-04)
39	1082	Spacer, 1.0 ID x 7/6 Lg.	NI	6593	Torque Converter Cover Decal (485-04)
40	4913	Spacer, 1.0 ID x 3 (485-03/04)	NI	3296	MPI Steering Wheel Decal (445-03 & 485-03)
40	1448	Spacer, 1.0 ID x 3%6 (445-03/04)	NI	6592	Custom Steering Wheel Decal (445-04 & 485-04)
41	1845	1/4-20 x 5/6 Hex Cap Screw	NI	6626	Tire Pressure Decal
42	1848	1/4-20 x 1 1/4 Hex Cap Screw	ASM	4930	Wheel Asm., 5" Knobby (Inc. Ref. #70-76) (445-03 &
43	1019	Tywrap			485-03)
44	9052	3/4-16 Hex Toplock Nut	ASM	4930B	Wheel AsmBlack, 5" Knobby (Inc. Ref. #70-76)
45	8009	Brake Pedal			(445-04 & 485-04)
46	6123	Key, 1/4 x 1/4 x 13/4	ASM	4924P	Wheel Asm., 6" Turf Saver (Inc. Ref. #59-65) (445-03
47	9091	3/4 Std. Flat Washer			& 485-03)
47 48	1389	Bushing	ASM	4924B	Wheel AsmBlack, 6" Turf Saver (Inc. Ref. #59-65)
48 49	9110	3/4 Shoulder Bolt			(445-04 & 485-04)
		78 Shoulder Bolt Tie Rod (Long) (485-03/04)	ASM	4358	Tie Rod L.H (Short) (Inc. Ref. #50-54) (485-03/04)
50	5003		ASM	4359	Tie Rod RH (Long) (Inc. Ref. #50-54) (485-03/04)
50	4356	Tie Rod (485-03/04)	ASM	4355	Tie Rod (Inc. Ref. #50-54) (445-03/04)
50	4352	Tie Rod (Qty. 2) (445-03/04)		2999	Sprocket Assembly (Inc. Ref. #16-18 & 94)
51	9092	%-24 RH Hex Jam Nut	ASM	2333	oproduct Assembly (IIIo. Hel. # 10-10 of 3-1)
52	1414	Rod End, RH	MI NO	T	
53	1415	Rod End, LH		T ILLUSTRATED	
54	9024	%-24 LH Hex Jam Nut	ASM =	COMPLETE ASS	EWIDLY
55	9158	%-16 x 21/4 Hex Cap Screw			
56	9085	%-16 Toplock Hex Nut			
57	1846	1/4-20 x 3/4 Hex Cap Screw			
58	8011	Throttle Pedal			

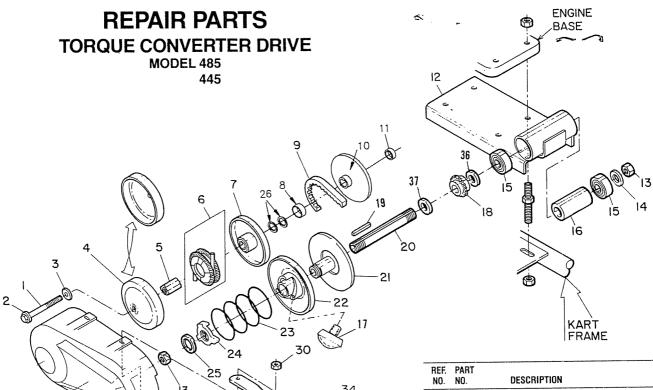

-35

KART FRAME

THROTTLE CABLE INSTALLATION					
FUEL TANK					
THROTTLE CABLE HOUSING					
RETAINER 1628					
SPRING ANCHOR S926 S927 SPRING HOLD-DOWN SCREW S931					
THROTTLE CABLE STOP 5928					

NO.	NO.	DESCRIPTION
1	1454	5/16-24 x 13/4 Hex Cap Screw
2	1124	5/16 Lockwasher
3	1398	21/64 Flat Washer
4		Driver drum
5		Driver hub
6		Driver shoe asm.
7		Moveable sheave - driver
8	200349	Bushing
9	5959	Belt
10		Stationary sheave - driver
11	1938	Spacer
12	1110	Chassis
13	1136	%-18 UTA Locknut
14	1469	% I.D. Spacer/washer
15	5090	Bearing
16	1116	Bearing spanner
17	6804	Nylon button - cam - heavy duty
	3504	Sprocket - 12 tooth - 3/8" pitch
19	3403	¾6 square x 2
20	1118	Jackshaft
21		Stationary sheave
22		Moveable sheave with cam
23	6805	Spring
24		Cam
25	2477	Retaining ring
26	200-836	Washer
27		Cover
28		#8-32 x 1/2 Hex head screw
29		#8 Flat washer
30		#8-32 UTA Locknut
31		Mounting bracket
33	1846	1/4-20 x 3/4 Hex head screw Gr 5
34	9057	1/4-20 UTA Locknut
	1854	1/4 Flat washer
36		% I.D. x % O.D. x 1/4 Spacer
	1119	% I.D. x % O.D. x % Spacer
ASM	1 5957	Driving pulley asm. (assembled to crankshaft)
ASN	1 5958	Driven pulley asm. (assembled to
		jackshaft)

ASSEMBLY: Pass the throttle cable through the cable retainer and butt the throttle cable housing end against the inside shoulder of the cable retainer. (The cable retainer is to be securely fastened to the engine with the clamping screw.) Pass the end of the Throttle Cable through the hole in the cable stop. Before tightening cable stop screw:

1. Ensure spring anchor, spring, and cable are installed as illustrated above.

2. Ensure throttle pedal is in rearward (idle) position.

3. Ensure that there is no slack in the throttle cable with no tension applied to return spring.

4. Ensure cable housing is inside and against the cable retainer.

29

28