OPERATOR'S MANUAL SUPPLEMENT Model No. 720L

A WARNING:

Read Engine Owner's Manual, Vehicle Operator's Manual, and Supplement Carefully Before Operating Vehicle.

Parts List



THIS VEHICLE IS FOR OFF-ROAD USE ONLY

BEFORE OPERATING THIS VEHICLE, THE OWNER AND/OR OPERATOR MUST UNDERSTAND THE VEHICLE WAS NOT DESIGNED OR MANUFACTURED TO MEET SPECIFICATIONS FOR USE ON STREETS, HIGHWAYS, OR THOROUGHFARES AND HAVE READ AND HAVE AN UNDERSTANDING OF ALL THE INSTRUCTIONS FOR SAFE ASSEMBLY AND OPERATION AS WELL AS THE INSTRUCTIONS GOVERNING THE ENGINE AND OTHER PORTIONS OF THE VEHICLE.

	L
	L
2	L
	l
	l
STN	
ST 7	
ST 7	
ST 7	
ARTS LIST N	
ARTS LIST N	
ST 7	
ARTS LIST N	

PART# DESCRIPTION

REF

REF	PART#	DESCRIPTION
32	9146	BOLT 3/8-16 X 1.50 HHCS G5 ZINC
33	6293-16	BRAKE PEDAL
34	6309-16	THROTTLE PEDAL
35	1189	NUT 5/16-18 HEX TL ZINC
36	8655	SEAT SLIDE – PAIR
37	9176	BOLT 5/16-18 X 1.00 HHCS G5 ZINC
38	1447	SHOULDER BOLT 5/16-18 X 11/16THD
39	9091	WASHER FLAT 3/8 SAE N ZINC
41	1848	BOLT 1/4-20 X 1.25 HHCS G5 ZINC
42	1849	BOLT 1/4-20 X 1.50 HHCS G5 ZINC
43	1846	BOLT 1/4-20 X .750 HHCS G5 ZINC
44	1847	BOLT 1/4-20 X 1.00 HHCS G5 ZINC
45	1389	BUSHING .25ID X .031G X .313
46	9502	PEDAL SPRING – LEFT WOUND
47	9503	PEDAL SPRING – RIGHT WOUND
48	1854	WASHER NBR 14 FLAT MS ZINC
49	8251	THROTTLE CABLE (INCLUDES #50)
50	9058	NUT 5/16-24 HEX JAM
54	2388	
55	C1001	HYDRAULIC BRAKE & MASTER CYLINDE ASSEMBLY
56	12496	STEERING WHEEL
IN	12481	STEERING WHEEL CAP
57	9103	BOLT 1/-20 X 2.00 HHCS G2 ZINC
58	9057	NUT 1/4-20 TL ZINC
59	3818	CHAIN 420 X 80P (INCL #60)
60	2037	MASTER LINK 420
61	13190	REAR WHEEL ASSEMBLY (INCLUDES 62 & 65)
62	13488	TIRE - 22 X 11-8 BADLAND
64	G0725	LOOM 7.25L X 1.6250D
65	13302	WHEEL FLANGE ASSY – HEX
99	1428	NUT ½-20 CONE WHEEL
67	8227	NUT ¼-20 CLIP
68	11387	LOOP CLIP 1.25ID
69	1876	BOLT ½-20 X .625 HH WF ZINC
12	2449	TINNERMAN NUT
72	13588	TOP COVER

3 H H H H H H H H H H H H H H H H H H H	WAR'T'	DESCRIPTION
	3535.70	EDAME IN TDAMADINE BUILE
-		32
	3535-44	FRAME – MINERAL BRONZE
2	13537	REAR SWINGARM ASSY (INCL #15)
3	11954-2Z	RIGHT FRONT SWINGARM W/ZERK
IN	11955-2Z	LEFT FRONT SWINGARM W/ZERK
•	11923-37	. .
4	11923-40	REAR BAR – SPAKKLE SILVER REAR BAR – MINERAL BRONZE
	- ·	BAR - RED WAG
<u>م</u>	11925-40 11925-44	OVERHEAD BAR – SPARKLE SILVER OVERHEAD BAR – MINERAL BRONZE
9	13603-2	ILACK
2	9022	WASHER ½ STD FLAT ZINC
ω	9188	BOLT 1/2-13 X 1.50 HHCS G5 ZINC
6	13503	NUT ½-13 CENTERLOCK HEX ZINC
10	1264	BOLT ½-13 X 3.75 HHCS G2 ZINC
11	10834	BOLT 1/2-13 X 7.00 HHCS G5 ZINC
12	1104	SPACER SPLIT .812OD .625ID 1.00L
14	13354	NUT 5/8-11 CL HEX ZINC
15	12140	BRONZE BUSHING .625 X 1.25
16	12141	SHOULDER BOLT ½ X 1.875
17	13191	FRONT WHEEL ASSEMBLY (INCLUDES 20)
18	5090	
19	13504	BOLT 1/2-13 X 1.00 HHCS G5 ZINC
20	13486	TIRE - 16 X 6.50-8 BADLAND
21	9674-16	SPACER 3/8 X 3/8 ZINC
22	11950-2Z	RIGHT SPINDLE W/ZERK – BLACK
IN	11951-2Z	LEFT SPINDLE W/ZERK – BLACK
23	12467	TIE ROD ASSEMBLY LONG (INCL. 25.26.28-30)
24	4355	ю.
25	1414	RIGHT THREAD ROD END
26	9092	RIGHT JAM NUT 3/8-24
27	4352	TIE ROD 9.50 INCH
28	12466	TIE ROD 16.50 INCH
29	9024	LEFT JAM NUT 3/8-24
30	1415	LEFT THREAD ROD END
31	9158	BOLT 3/8-16 X 2.25 HHCS G5 ZINC

REPLACEMENT - LIGHTS ONLY (PAIR) 10 AMP FUSE (USED IN RUN LIGHTS) LIGHT & STOP SWITCH W/WIRING BOLT 3/8-16 X 1.75 HHCS G5 ZINC BOLT 3/8-16 X 3.25 HHCS G5 ZINC **REPLACEMENT – 35WATT BULB** WASHER FLAT 3/8 USS W ZINC SPACER .25ID .312OD .625 BR COTTER PIN 3/32 X .750 ZINC BACK/BOTTOM SINGLE SEAT LAP/SHOULDER SEAT BELT FLOOR PAN SCUFF DECAL NUT 5/16-18 HEX WF ZINC WARNING DECAL SHEET WARNING DECAL SHEET BRAKE HANDLE COVER FOAM 4.50 INCH BLACK NUT 3/8-16 TL HEX ZINC BOLT 1/-20 X .50 HH WF VOLTAGE REGULATOR TAV COVER ASSEMBLY BRAKE LINK – BLACK CLEVIS PIN 1/4 X 1.50 SHOCK ABSORBER NUT 3/8-16 HEX WF **RIGHT SIDE PANEL** WIRING HARNESS BLACK VINYL CAP LEFT SIDE PANEL BOTTOM COVER ENGINE - 10HP BOLT 3/8-16 X 1 CHOKE CABLE BRAKE HUB HANDHOLD CABLE TIE M8 BOLT 13309-2 12018 12019 11636 13590 13589 13303 12039 12252 12015 11330 12008 11836 13096 11081 13331 13336 9006 13097 12761 9145 1019 13601 9116 6606 6442 9869 9125 9929 8778 9190 9085 9192 8118 1263 8484 4372 QM OM QM QM 105 MD 100 101 102 103 104 76 83 84 86 88 89 6 91 Z 94 95 96 98 66 Z 74 79 80 82 87 97 75 78 73 11 8

R

R E E	PART#	DESCRIPTION	REF	PART#
ASM	2594		142	13298
106	**	1	143	C1010
107	2472	EXTENSION SPRING	145	9060
108	2470	CAM ROLLER	146	2265-16
109	2471	SPRING CLIP	147	13299
110	**	MOVEABLE FACE AND HUB	148	13300
111	2474		149	1194
112	2475	COMPRESSION SPRING	150	13355
113	**	RETAINING RING	151	9338
114	**	FIXED FACE AND POST	152	13301
ASM	8664	DRIVEN PULLY	153	6701
115	**	FIXED FACE AND POST	154	11928-37 11928-40
117	2483	SPACER		11928-44
118	**	MOVEABLE FACE AND CAM	155	6320
119	2516	BUTTON INSERT	156	5447
120	2480	TORSION SPRING	157	12016-2
121	**	FIXED CAM	169	11361
122	2478	THRUST WASHER	170	6452
123	2477	RETAINING RING	171	2386
124	1466	NUT 5/8-11 FLEXLOCK JAM	172	13617-2
125	9101	BOLT 5/16-24 X .50 HHCS G5 NL ZINC	173	13522
126	12350	BOLT STUD 7/16-20 X 4.25 G5 ZINC	174	8604
127	2467	WASHER 7/16 SL	175	8402
128	2468	PILOT WASHER	176	9430
129	8720	SPROCKET 420P 9T INTEGRAL KEY	177	9468
130	3403	KEY 3/16 SQ X 2.000	178	9642-2
131	1119	SPACER .625ID 1.0620D .125 THK	179	13324
132	1082	SPACER 1.00ID 14G 438L ZINC SPLIT	Z	12149
133	11808	BLACK VINYL CAP	Z	12150
134	13079-2	COVER PLATE – BLACK	MD	3610
136	3887	SPACER - 1.0 ID X 1/16	MD	12351
137	12346	DRIVE BELT	180	6803-2
138	13078-2	TAV CHASSIS WDMT - BLACK	181	5135
139	2430	SPANNER 5/8 ID X 7-1/8 - 14 GA	182	6046
140	8854	JACKSHAFT - 13.688	183	6039
141	12349	ENGINE SUPPORT SPACER	184	13456


IST MODEL 720L


L L L	HAKI#	DESCRIPTION
142	13298	AXLE
143	C1010	BRAKE ROTOR - 8.63 X .156
145	9060	WASHER 5/16 TYPE A PLAIN SAE N ZINC
146	2265-16	SPACER 1.00ID 12G .750L ZINC
147	13299	BEARING PRECISION – HEX
148	13300	BEARING FLANGE HEAVY
149	1194	WASHER ¾ SAE FLAT ZINC
150	13355	NUT 3/-10 HEX CENTERLOCK ZINC
151	9338	SPROCKET 420P 60T
152	13301	HEX SPROCKET HUB
153	6701	BOLT 5/16-18 X 1.25 SHCS PLAIN
154	11928-37 11928-40 11928-44	CENTER BAR – RED WAGON CENTER BAR – SPARKLE SILVER CENTER BAR – MINFRAL BRONZF
155	6320	SINGLE
156	5447	SAFETY FLAG – 6 FT
157	12016-2	HEADREST FRAME – BLACK
169	11361	FLAG MOUNTING BOLT
170	6452	BOLT 3/8-16 X 5.00 HHCS G5 ZINC
171	2386	BOLT 3/8-16 X 3.50 HHCS G5 ZINC
172	13617-2	STEERING PIVOT LEVER -BLACK
173	13522	IMPELLER
174	8604	NUT 7/16-20 HEX
175	8402	NUT 7/16-20 TL HEX
176	9430	BATTERY HOLD DOWN ROD
177	9468	NUT NBR 10-32 NL WING
178	9642-2	BATTERY CLAMP BAR – BLACK
179	13324	BATTERY
NI	12149	BATTERY BOOT – RED
NI	12150	BATTERY BOOT – BLACK
MD	3610	BATTERY CABLE BLACK 9IN
MD	12351	WIRING DIAGRAM
180	6803-2	CONTROL PANEL COVER - BLACK
181	5135	TINNERMAN NUT
182	6046	BOLT NBR 10-24 X .500 HHMS ZINC
183	6039	WASHER NBR 10 IL ZINC
184	13456	BOLT 3/8-24 X 1.00 HHCS GR5 NL
186	12348	RETURN SPRING


REF	PART#	REF PART# DESCRIPTION
187	12347	SWIVEL SCREW
188	9030	LOCKWASHER 5/16
189	13619-2	BRAKE ROD LONG - BLACK
190	C1000	RACK AND PINION
191	1130	WASHER 3/8 SL
192	13454-2	STEERING LINK BRACKET - BLACK
193	200841	FENDER WASHER
194	13344-16	13344-16 SPACER - 1.25ID X 12G X 5.00 - ZINC
195	13604	BRAKE CABLE
MD	13631	20 AMP FUSE (USED ON VOLTAGE REG)

ASM = ASSEMBLY


NI = NOT ILLUSTRATED
WD = WIRING DIAGRAM
** = NOT SOLD SEPERATELY

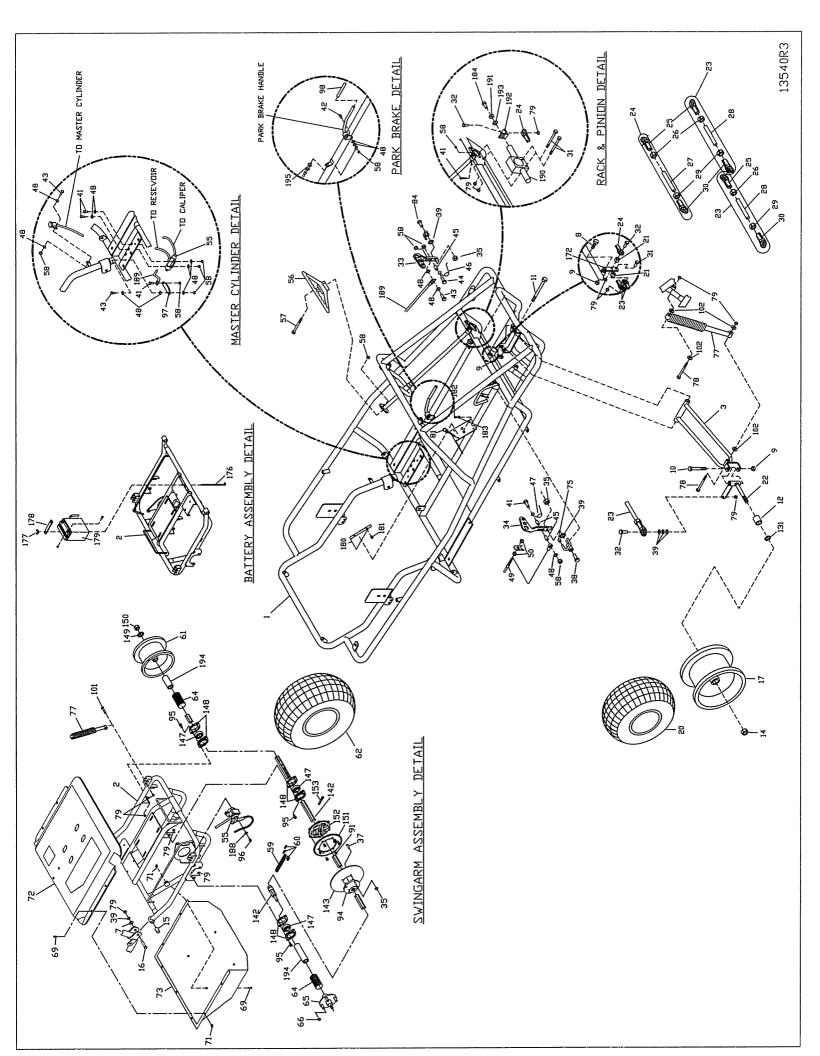

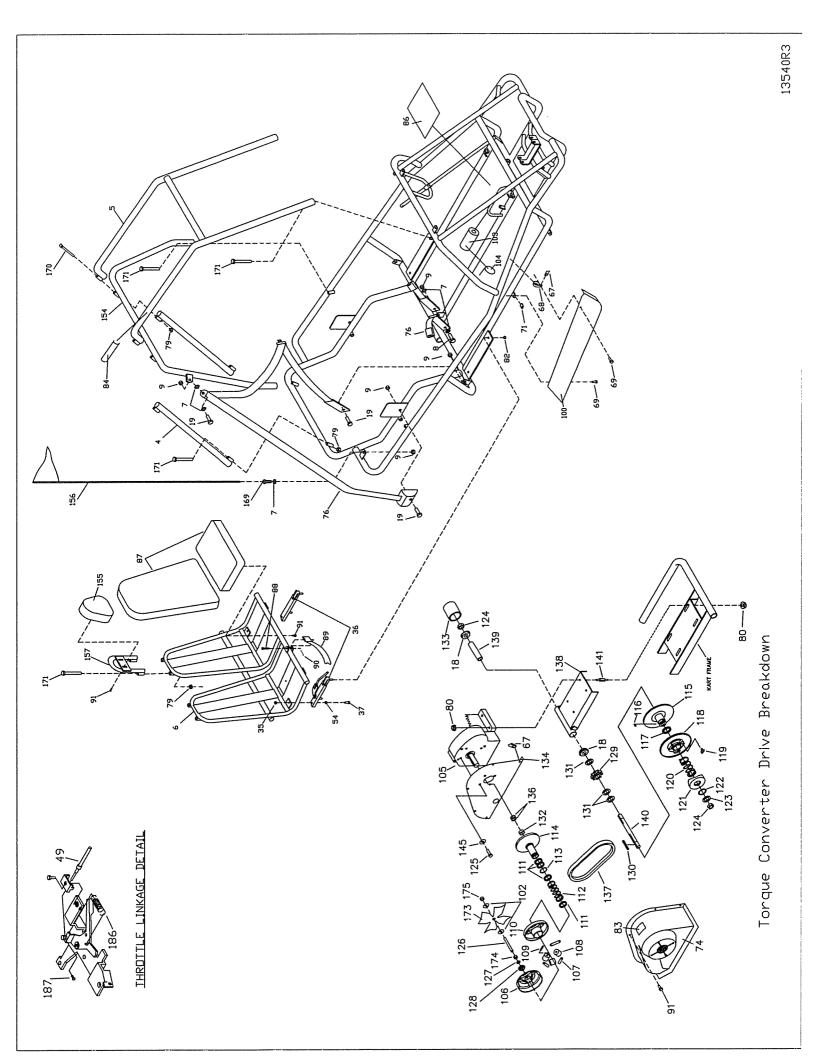


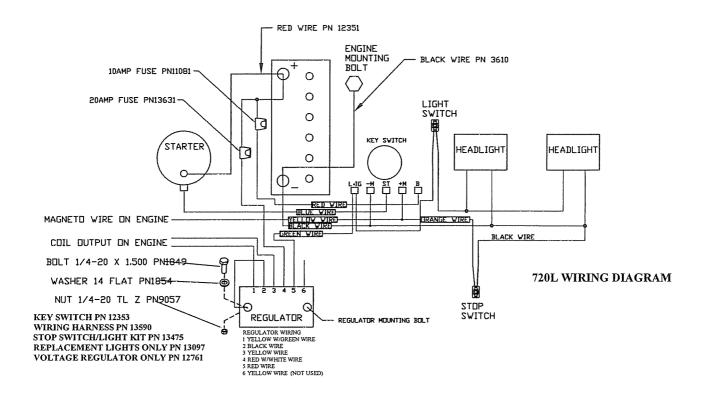

720 MAINTENANCE INSTRUCTIONS

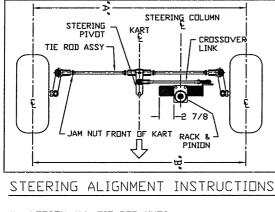

- LODSEN ALL TIE ROD NUTS 1)
- 2) ROTATE STEERING WHEEL SUCH THAT DIMENSION FROM THE END OF THE RACK AND PINION TO THE RACK AND PINION BODY IS 2 7/8". REF ABOVE DIAGRAM
- ADJUST THE CROSSOVER LINK SUCH THAT 3) THE STEERING PIVOT RUNS PARALLEL TO THE CENTERLINE OF THE KART AS SHOWN 4) TIGHTEN CROSS OVER LINK JAM NUTS
- ADJUST RH AND LH TIE ROD ASSEMBLIES 5) SUCH THAT DIMENSION 'A' IS 3/8'-1/2' LONGER THAN DIMENSION "B"
- RETIGHTEN RH AND LH TIE ROD JAM NUTS 6)

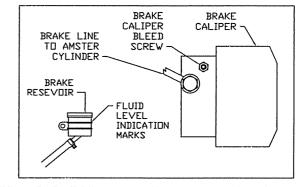

BRAKE BLEED/ADJUSTMENT INSTRUCTIONS

- INSPECT FLUID RESEVOIR BEHIND SEAT 1) ENSURE THAT THE FLUID LEVEL IS BETWEEN THE INDICATION MARKS
- 2) ADD DOT 3 BRAKE FLUID IF REQUIRED
- UNCAP AND LODSEN BRAKE CALIPER BLEED 3) SCREW
- HAVE A SECOND PERSON DEPRESS THE BRAKE 4) PEDAL SLOWLY UNTIL THE PEDAL BOTTOMS DUT
- 5) HOLD THE PEDAL IN THE DEPRESSED POSITION UNTIL THE BLEED SCREW IS RETIGHTENED PUMP THE BRAKE PEDAL TWO TO THREE TIMES
- 6) AND REPEAT PROCEDURE UNTIL THE PEDAL FEELS FIRM DURING THE PEDAL STROKE
- AIR BUBBLES SHOULD BE SEEN AT THE BLEED 7) SCREW DURING THE BLEED PROCEDURE UNTIL PEDAL BECOMES FIRM
- 82 TIGHTEN AND RECAP THE BLEED SCREW

.3540R3